



# MSA Rescuer & Workman Bracket

➤ Assembly & Operation Guide

# > Contents

## MSA Rescuer

Fitting the device into the Bracket	4
<b>PORTA</b> GANTRY <b>RAPIDE</b> 500	6
<b>PORTA</b> GANTRY <b>RAPIDE</b> 1000	8
<b>PORTA</b> GANTRY Small & Medium	10

## MSA Workman

Fitting the device into the Bracket	12
<b>PORTA</b> GANTRY <b>RAPIDE</b> 500	14
<b>PORTA</b> GANTRY <b>RAPIDE</b> 1000	16
<b>PORTA</b> GANTRY Small & Medium	18

## MSA Rescuer & Workman

Fitting device into Bracket (Rescuer)	20
Fitting device into Bracket (Workman)	22
<b>PORTA</b> GANTRY	24
<b>T</b> DAVIT	26
<b>PORTA</b> DAVIT <b>QUANTUM</b> Column	28
<b>PORTA</b> DAVIT <b>QUANTUM</b> Backstay	30
<b>PORT</b> X DAVIT	32

# Lightweight. Portable. **Safe.**

Please read the following instructions and guidance notes carefully. These have been designed to aid users in carrying out the correct assembly of the bracket for each of our compatible lifting systems. Systems compatible with this product are:

- **PORTA**GANTRY<sup>[RAPIDE]</sup>
- **PORTA**GANTRY<sup>\*</sup>
- **T**DAVIT<sup>\*</sup>
- **PORTA**DAVIT<sup>[QUANTUM]</sup>
- **PORTX**<sup>\*</sup> DAVIT

## General Specification

- Maximum rated capacity for personnel lifting - 330lb
- Ensure the rating of the Winch is always checked before use
- For use with REID lifting products only

## Standards

- Complies with the requirements of OSHA 1910 sub part I (.140) & 1926 sub part M

For further information please refer to the technical data sheet for this product.


# ➤ Assembly Instructions: Fitting the Device

The following instructions detail the assembly of the MSA Rescuer device into the bracket when used with a **PORTA**GANTRY<sup>®</sup> or small or medium **PORTA**GANTRY.



Appropriate PPE should be worn: ➤ **Gloves** ➤ **Protective Footwear**


Assembling the **MSA Rescuer Device** onto the bracket when using a **PORTAGANTRY<sup>®</sup> [RAPIDE]** or **PORTAGANTRY<sup>®</sup>**.

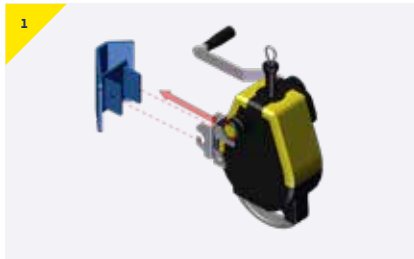

➤ Present the device to the bracket.



➤ Secure the device using the pin provided.

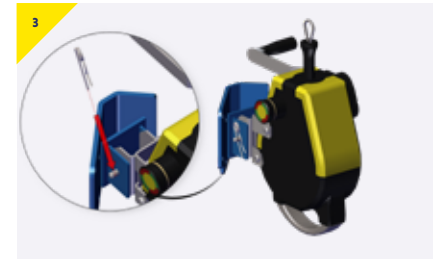

➤ Secure the pin in position using the R-Clip provided.



➤ The device is now ready to use.

5

**Now install the product  
into face bracket.**

# ➤ Assembly Instructions: PORTAGANTRY <sup>RAPIDE</sup> 500

The following instructions detail the assembly of the MSA Rescuer bracket [US-RAWB008020] for the PORTAGANTRY <sup>RAPIDE</sup> 500kg.

Appropriate PPE should be worn: ➤ Gloves ➤ Protective Footwear




## MSA Rescuer Bracket - [US-RAWB008020]


### Assembling the **MSA Rescuer Bracket** on **PORTAGANTRY<sup>®</sup> RAPIDE<sup>®</sup> 500**




- > The bracket comes with the pin and M12 bolts supplied, as shown above.

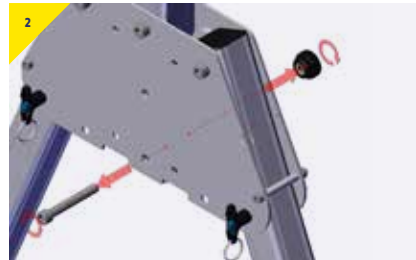

- > Remove the bottom bolt from the trap plate.

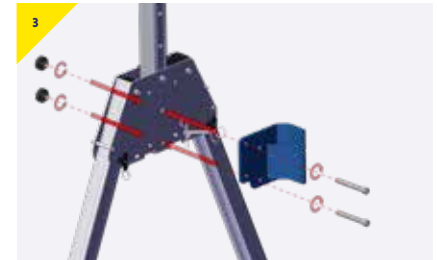

- > Present the bracket to the trap plate and secure in the central holes using the M12 bolts supplied.

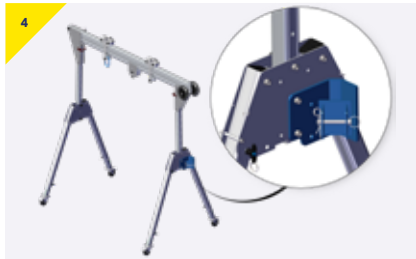

- > The bracket is secured and ready for the device to be attached.

# ▶ Assembly Instructions: PORTAGANTRY<sup>®</sup> RAPIDE 1000

The following instructions detail the assembly of the MSA Rescuer Bracket [US-RAWB008020] for the **PORTAGANTRY<sup>®</sup> RAPIDE 1000kg**.

Appropriate PPE should be worn: ▶ **Gloves** ▶ **Protective Footwear**






## MSA Rescuer Bracket - [US-RAWB008020]


### Assembling the MSA Rescuer Bracket on PORTAGANTRY<sup>®</sup> RAPIDE<sup>®</sup> 1000



- The bracket comes with the pin and M12 bolts supplied, as shown above.

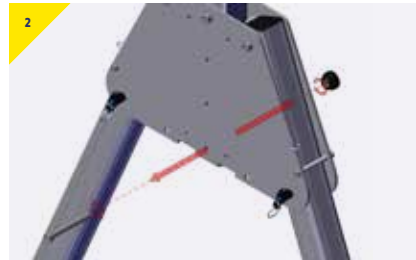

- Remove the bottom bolt from the trap plate.

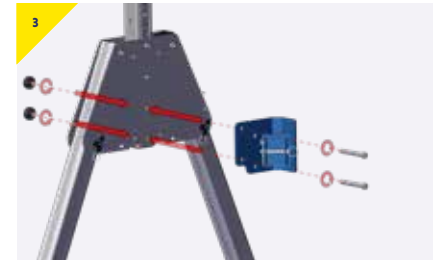

- Present the bracket to the trap plate and secure in the lower central holes using the M12 bolts supplied.




- The bracket is secured and ready for the device to be attached.

# ➤ Assembly Instructions: PORTAGANTRY® S & M


The following instructions detail the assembly of the MSA Rescuer Bracket [US-RAWB008020] for the PORTAGANTRY® Small and Medium frame sizes.

Appropriate PPE should be worn: ➤ Gloves ➤ Protective Footwear

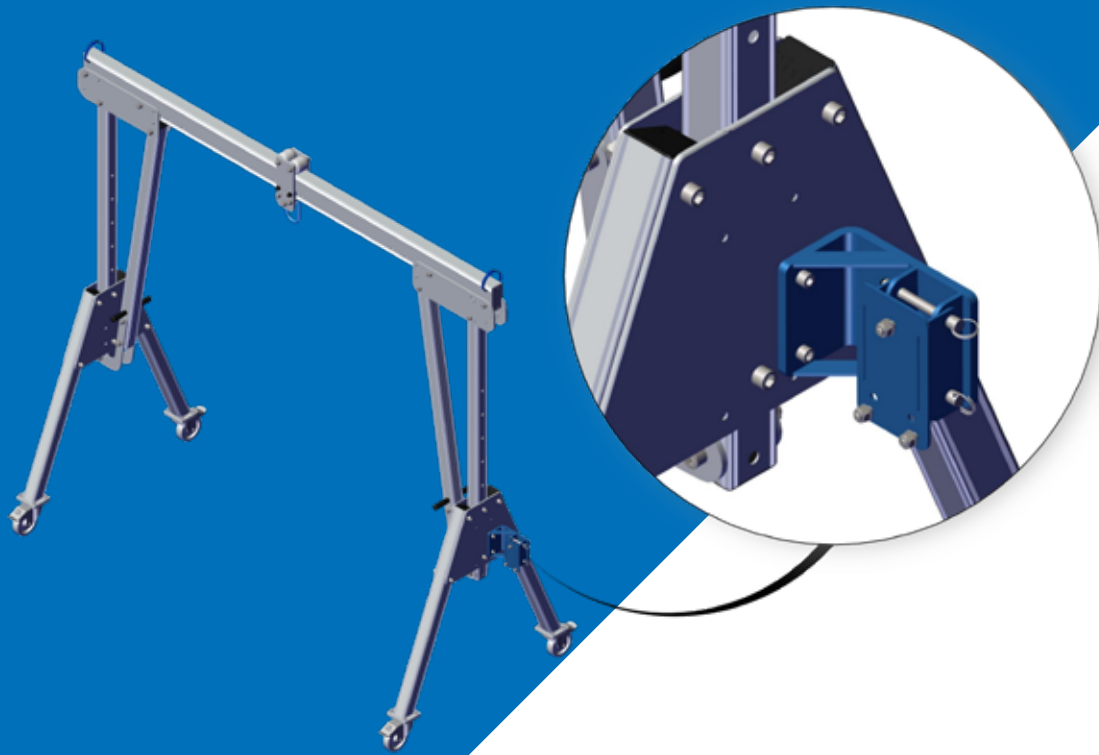


## MSA Rescuer Bracket - [US-RAWB008020]

Assembling the **MSA Rescuer Bracket** onto a small or medium **PORTAGANTRY**\*

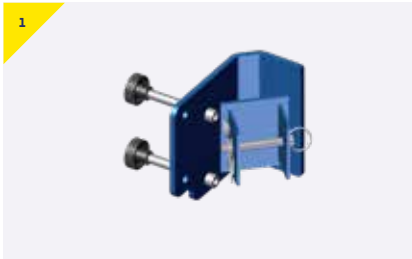

- > The bracket comes with the pin and M12 bolts supplied, as shown above.

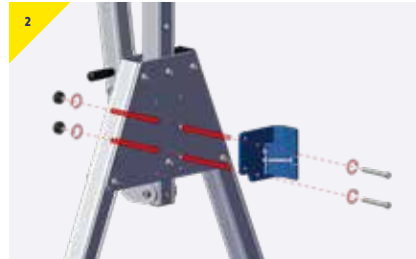

- > Present the bracket to the trap plate and secure in the holes as shown using the M12 bolts supplied.



- > The bracket is secured and ready for the device to be attached.


## ➤ Assembly Instructions: Fitting the Device

The following instructions detail the assembly of the MSA Workman device into the bracket when used with a **PORTA**GANTRY<sup>®</sup> **BAR**PETE or small or medium **PORTA**GANTRY.




Appropriate PPE should be worn: ➤ **Gloves** ➤ **Protective Footwear**

Assembling the **MSA Workman Device** onto the bracket when using a **PORTAGANTRY<sup>RAPIDE</sup>** or **PORTAGANTRY<sup>+</sup>**:

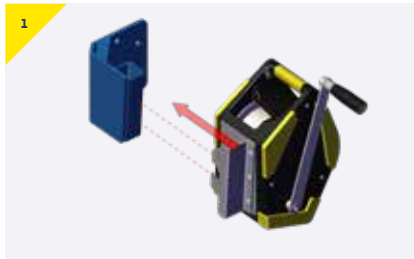

> Present the device to the bracket.

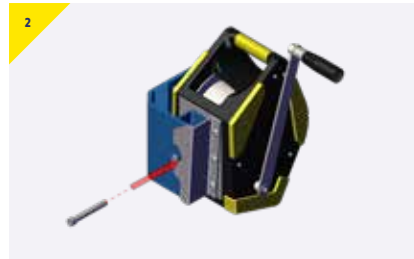

> Secure the device using the pin provided.




> The device is now ready to use.

4

**Now install the product  
into face bracket.**

# ➤ Assembly Instructions: PORTAGANTRY<sup>®</sup> RAPIDE<sup>®</sup> 500

The following instructions detail the assembly of the MSA Workman bracket [US-RAWB008220] for the PORTAGANTRY<sup>®</sup> RAPIDE<sup>®</sup> 500kg.

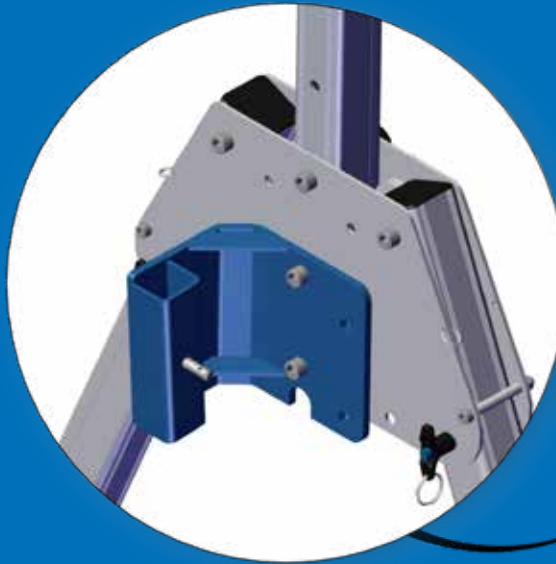


Appropriate PPE should be worn: ➤ **Gloves** ➤ **Protective Footwear**

# MSA Workman Bracket - [US-RAWB008220]


## Assembling the MSA Workman Bracket on PORTAGANTRY[RAPIDE] 500




> The bracket comes with the pin and M12 bolts supplied, as shown above.

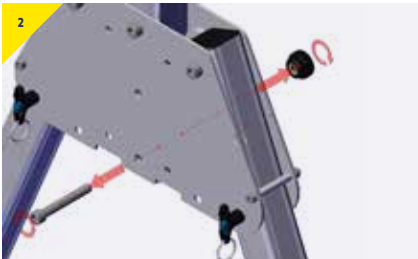

> Remove the bottom bolt from the trap plate.

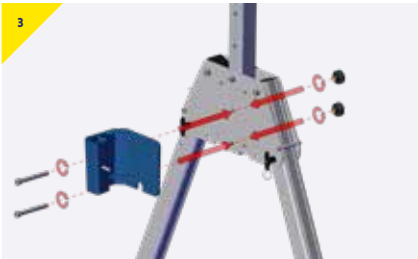

> Present the bracket to the trap plate and secure in the central holes using the M12 bolts supplied.

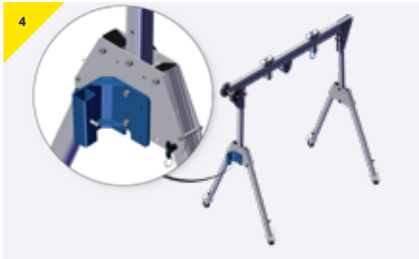

> The bracket is secured and ready for the device to be attached.

# ➤ Assembly Instructions: PORTAGANTRY<sup>®</sup> RAPIDE<sup>®</sup> 1000

The following instructions detail the assembly of the MSA Workman Bracket [US-RAWB008220] for the PORTAGANTRY<sup>®</sup> RAPIDE<sup>®</sup> 1000kg.



Appropriate PPE should be worn: ➤ Gloves ➤ Protective Footwear




# MSA Workman Bracket - [US-RAWB008220]


## Assembling the MSA Workman Bracket on PORTAGANTRY[RAPIDE] 1000




> The bracket comes with the pin and M12 bolts supplied, as shown above.

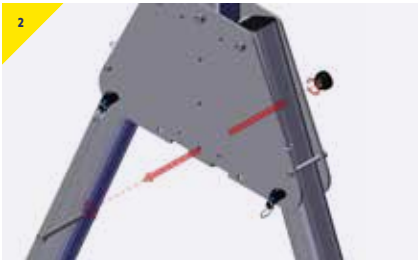

> Remove the bottom bolt from the trap plate.

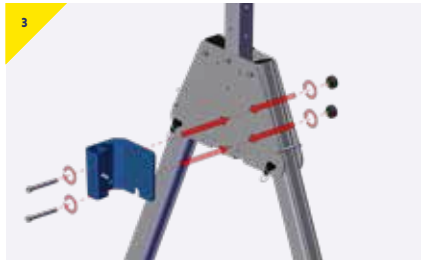

> Present the bracket to the trap plate and secure in the lower central holes using the M12 bolts supplied.

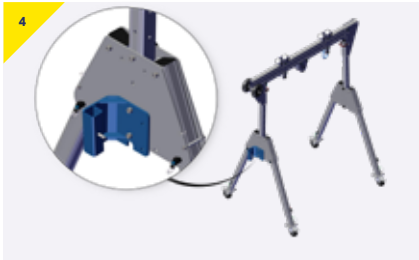


> The bracket is secured and ready for the device to be attached.

# ➤ Assembly Instructions: PORTAGANTRY® S & M

The following instructions detail the assembly of the MSA Workman Bracket [US-RAWB008220] for the PORTAGANTRY® Small and Medium frame sizes.

Appropriate PPE should be worn: ➤ Gloves ➤ Protective Footwear

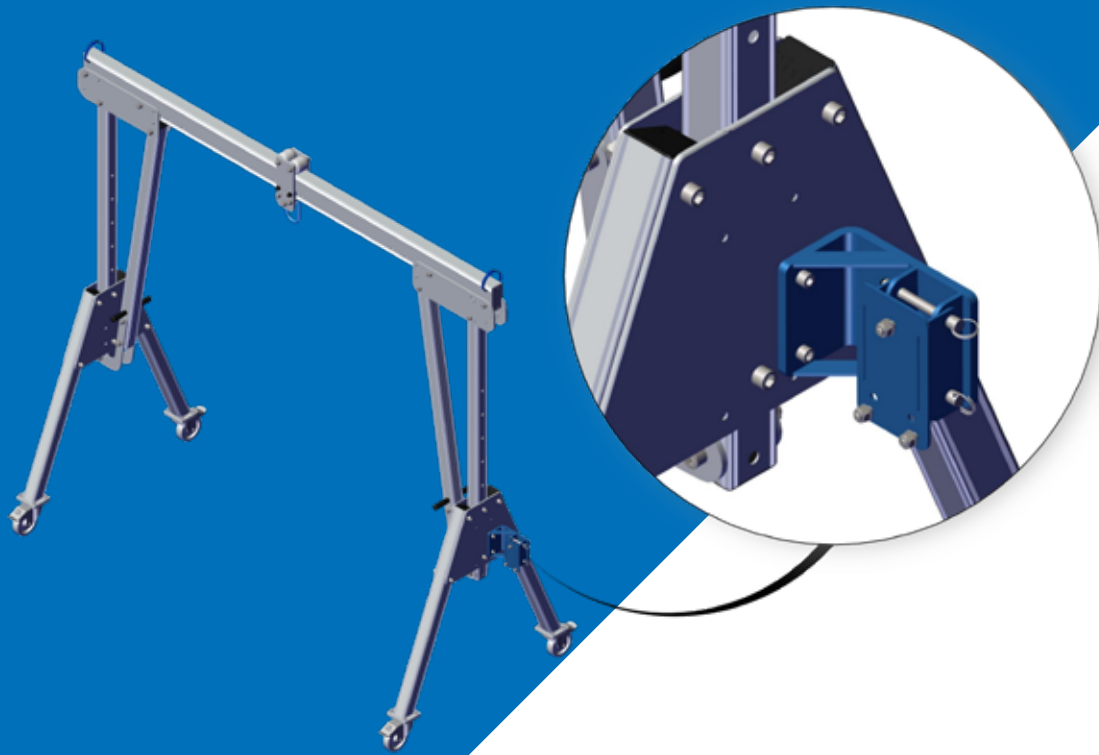


# MSA Workman Bracket - [US-RAWB008220]


Assembling the **MSA Workman Bracket** onto a small or medium **PORTA**GANTRY\*



> The bracket comes with the pin and M12 bolts supplied, as shown above.

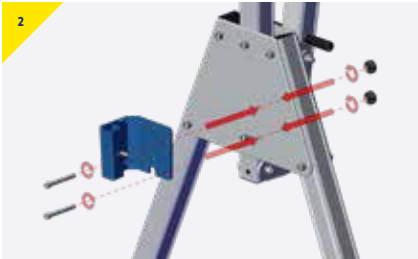

> Present the bracket to the trap plate and secure in the holes as shown using the M12 bolts supplied.

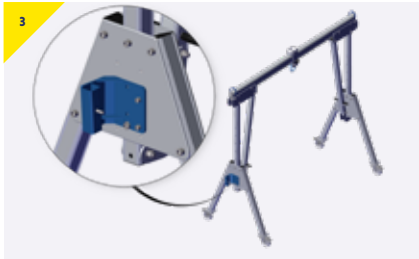

> The bracket is secured and ready for the device to be attached.

# ➤ Assembly Instructions: Fitting the Device

The following instructions detail the assembly of the MSA Rescuer device into the universal bracket.



Appropriate PPE should be worn: ➤ **Gloves** ➤ **Protective Footwear**


Assembling the **MSA Rescuer Device** onto the bracket when using a product which requires column or backstay attachment.



➤ Present the device to the bracket.



➤ Secure the device using the pin provided.

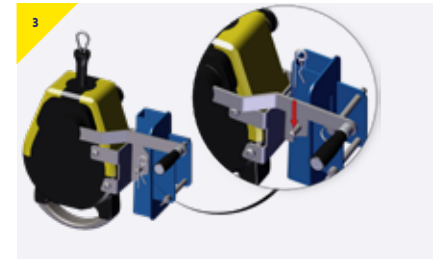

➤ Secure the pin in position using the R-Clip provided.



➤ The device is now ready to use.

5  
Now install the product  
into the column or backstay.


# ➤ Assembly Instructions: Fitting the Device

The following instructions detail the assembly of the MSA Workman device into the universal bracket.



Appropriate PPE should be worn: ➤ **Gloves** ➤ **Protective Footwear**

Assembling the **MSA Workman Device** onto the bracket when using a product which requires column or backstay attachment.

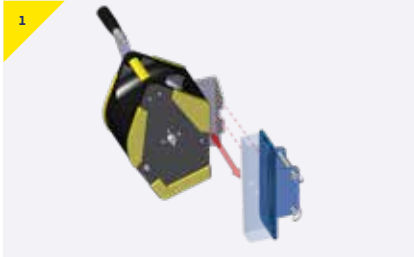

➤ Present the device to the bracket.



➤ Secure the device using the pin provided.



➤ The device is secured and ready to use.

4

**Now install the product  
into the column or backstay.**

# ➤ Assembly Instructions: PORTAGANTRY®

The following instructions detail the assembly of the MSA Rescuer & Workman Bracket [US-RAWB008000] for the PORTAGANTRY®.




Appropriate PPE should be worn: ➤ Gloves ➤ Protective Footwear




## MSA Rescuer & Workman Bracket [US-RAWB008000]


Assembling the **MSA Rescuer & Workman Bracket** onto a **PORTA**GANTRY\*

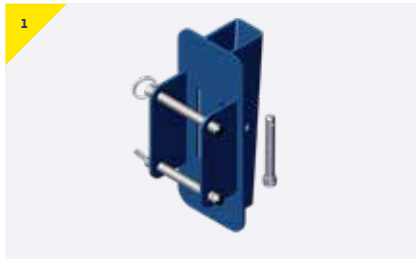

> The bracket comes with the pins supplied, as shown above.

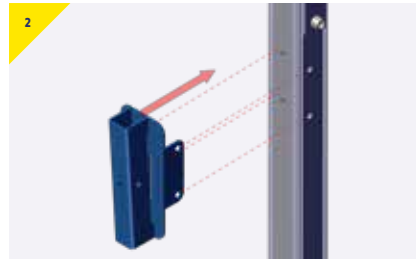

> Remove the pins and present the bracket to the column, aligned to the holes as shown.

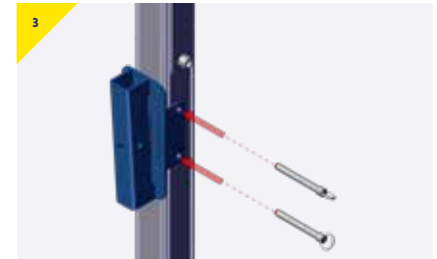


> Insert the pins to ensure the bracket is securely attached.



> The bracket is secured and ready for the device to be attached.

## > Assembly Instructions: TDAVIT®


The following instructions detail the assembly of the MSA Rescuer & Workman Bracket [US-RAWB008000] for the TDAVIT®.

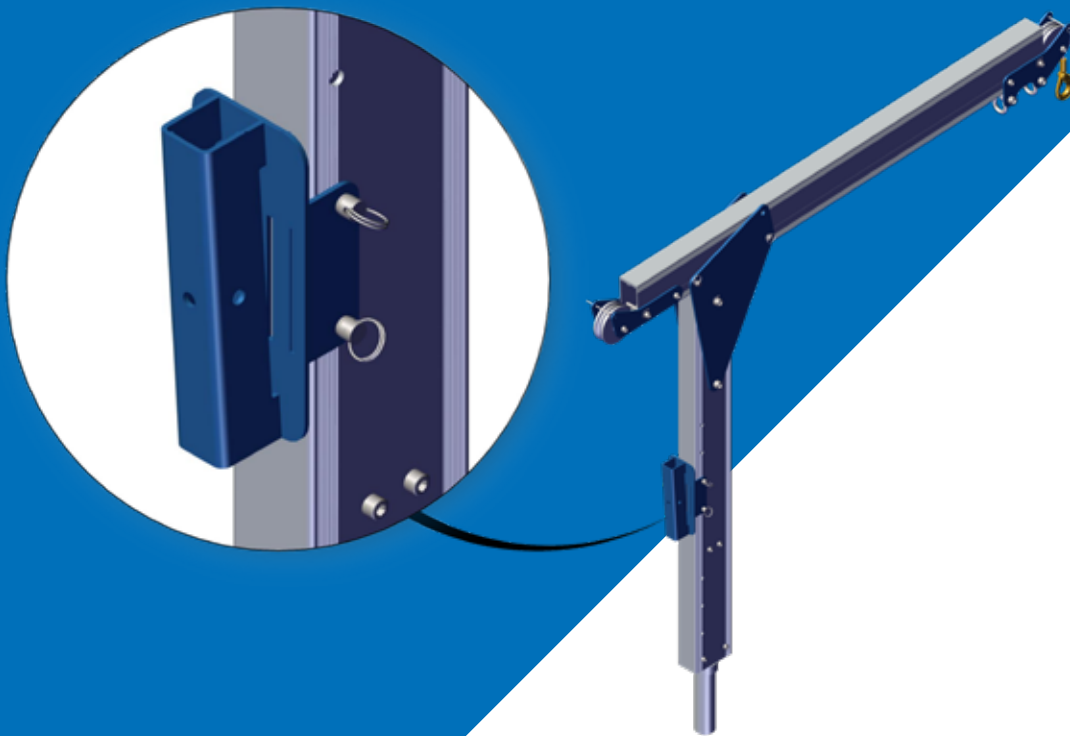


Appropriate PPE should be worn: > **Gloves** > **Protective Footwear**

## MSA Rescuer & Workman Bracket [US-RAWB008000]


Assembling the **MSA Rescuer & Workman Bracket** onto a **TDAVIT<sup>®</sup>**

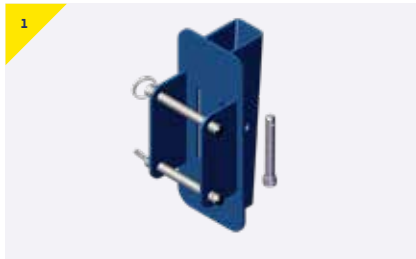


- > The bracket comes with the pins supplied, as shown above.

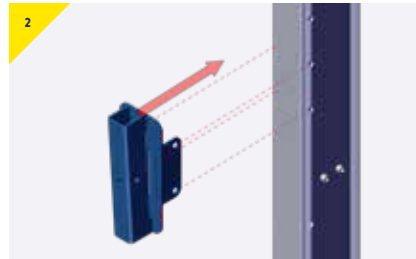

- > Remove the pins and present the bracket to the column, aligned to the holes as shown.

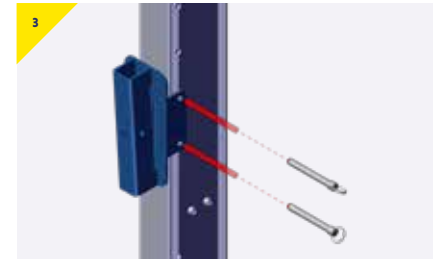

- > Insert the pins to ensure the bracket is securely attached.

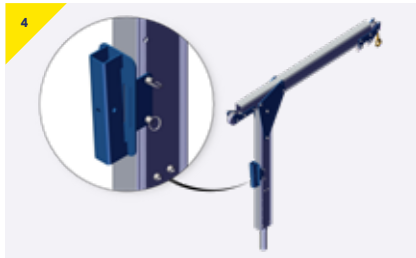


- > The bracket is secured and ready for the device to be attached.

# ➤ Assembly Instructions: PORTA DAVIT QUANTUM® Column.

The following instructions detail the assembly of the MSA Rescuer & Workman Bracket [US-RAWB008000] for the PORTA DAVIT QUANTUM column.


**Warning:** For this configuration a sheave bracket column is required.

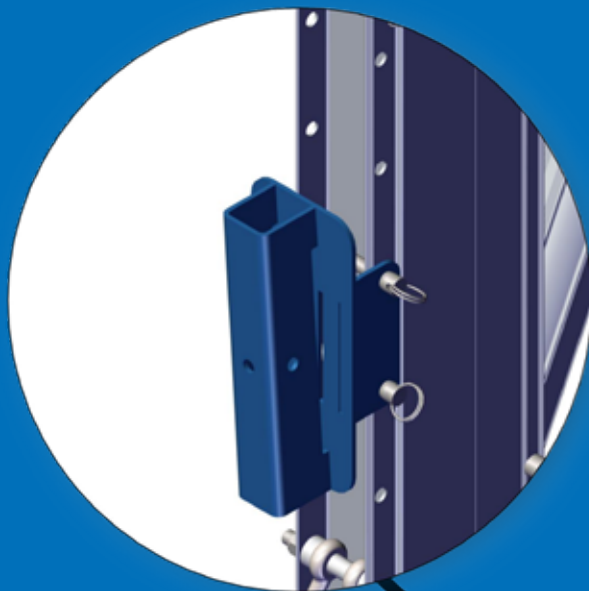


Appropriate PPE should be worn: ➤ Gloves ➤ Protective Footwear

## MSA Rescuer & Workman Bracket - [US-RAWB008000]


Assembling the **MSA Rescuer & Workman Bracket** onto a **PORTA DAVIT QUANTUM**® column.

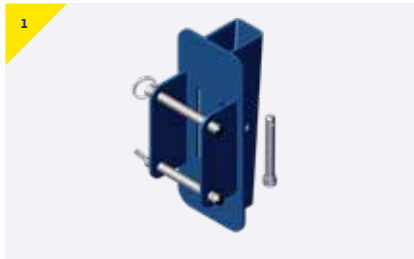

- 1 The bracket comes with the pins supplied, as shown above.

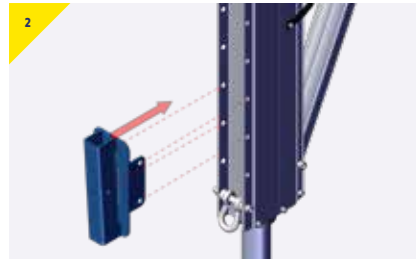


- 2 Remove the pins and present the bracket to the column, aligned to the holes as shown.

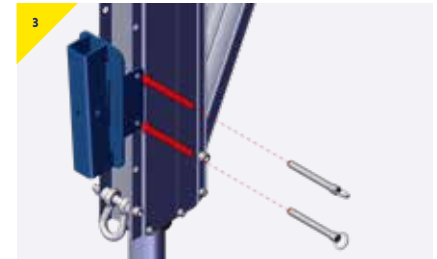


- 3 Insert both pins to ensure the bracket is securely attached.



- 4 Present the sheave bracket\* to the top of the column, aligning with the top holes as shown.

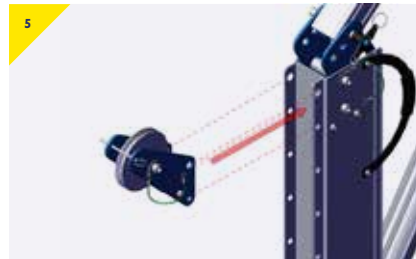

- 5 Secure using the pins provided.

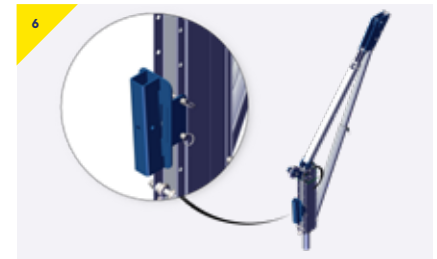


- 6 The bracket is secured and ready for the device to be attached.

\*US-RAW000095 - Sheave bracket PDQ Column  
Medium Sheave (4-7mm).

# ➤ Assembly Instructions: PORTA DAVIT QUANTUM® Backstay.


The following instructions detail the assembly of the MSA Rescuer & Workman Bracket [US-RAWB008006] for the PORTA DAVIT QUANTUM Backstay.

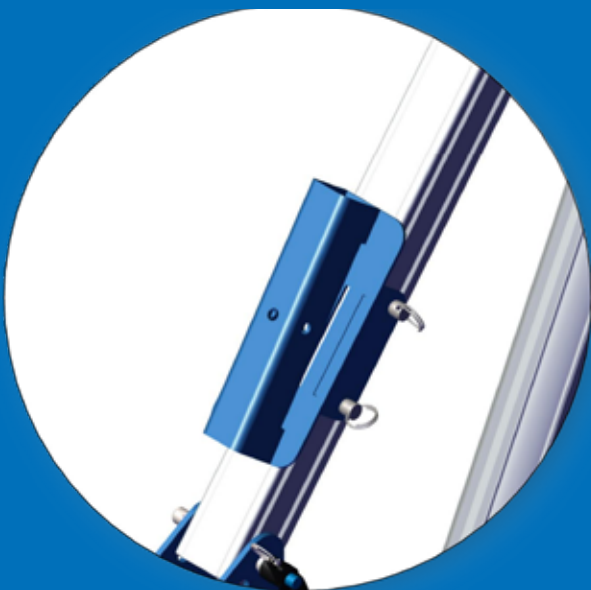


Appropriate PPE should be worn: ➤ Gloves ➤ Protective Footwear

## MSA Rescuer & Workman Bracket - [US-RAWB008006]

Assembling the **MSA Rescuer & Workman Bracket** onto a **PORTADAVIT<sup>QUANTUM</sup>** Backstay.

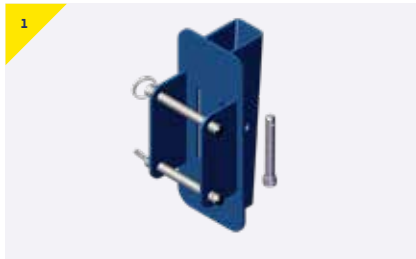

- > The bracket comes with the pins supplied, as shown above.

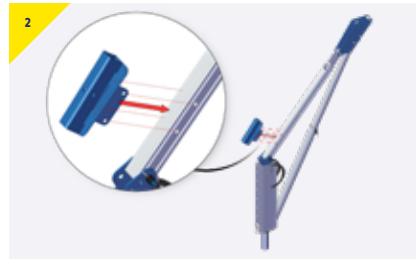

- > Remove the pins and present the bracket to the backstay, aligned to the holes as shown.



- > Insert both pins to ensure the bracket is securely attached.




- > The bracket is secured and ready for the device to be attached.

# ➤ Assembly Instructions: PORTX<sup>®</sup> DAVIT

The following instructions detail the assembly of the MSA Rescuer & Workman bracket [US-RAWB008000] for the PORTX<sup>®</sup> DAVIT.


Appropriate PPE should be worn: ➤ Gloves ➤ Protective Footwear

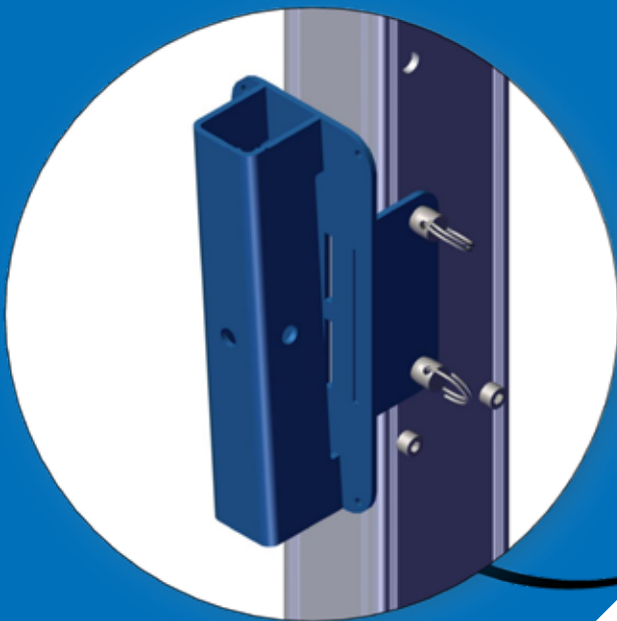




## MSA Rescuer & Workman Bracket - [US-RAWB008000]


Assembling the **MSA Rescuer & Workman Bracket** onto a **PORTX® DAVIT**.

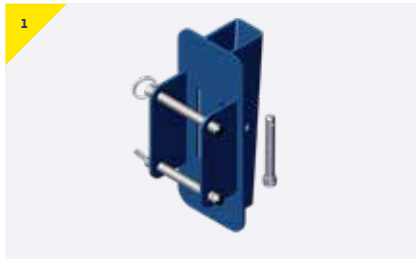


> The bracket comes with the pins supplied, as shown above.

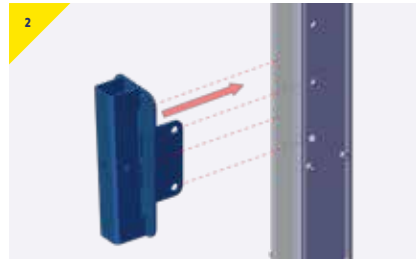

> Remove the pins and present the bracket to the column, aligned to the holes as shown.

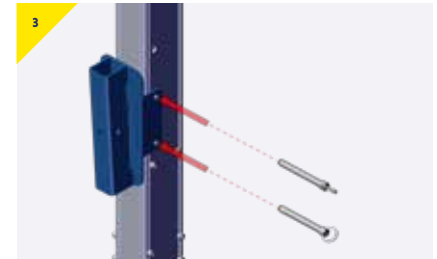

> Insert both pins to ensure the bracket is securely attached.

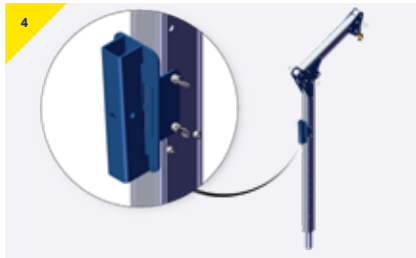

> The bracket is secured and ready for the device to be attached.





# Contact Us

## **REID Lifting Inc, USA**

7900 International Drive,  
Suite 300,  
Bloomington,  
MN 55425  
USA

- > +1-(888)-721-6411
- > [info@reidlifting.com](mailto:info@reidlifting.com)
- > [us.reidlifting.com](http://us.reidlifting.com)

All information herein is copyright protected by REID Lifting Ltd. All company and product names are Trade Mark and Trade Name protected and all REID Lifting Ltd. Product IPR is protected under Patents, Patents Pending and/or Design Rights.



Printed using environment friendly processes and materials.